(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 13 October 2005 (13.10.2005)

PCT

(10) International Publication Number WO 2005/095766 A1

(51) International Patent Classification7:

F01N 3/06

(21) International Application Number:

PCT/SE2005/000449

(22) International Filing Date: 24 March 2005 (24.03.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0400903-1

2 April 2004 (02.04.2004) SE

(71) Applicant (for all designated States except US): AK-TIEBOLAGET ELECTROLUX [SE/SE]; S-105 45 Stockholm (SE).

- (72) Inventor; and
- (75) Inventor/Applicant (for US only): EDHOLM, Fredrik [SE/SE]; Övre Kvarngatan 22, S-554 47 Jönköping (SE).
- (74) Agent: LILJEGREN, Fredrik; AB Electrolux, Group Intellectual Property, S-105 45 Stockholm (SE).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPARK CATCHER FOR A MUFFLER

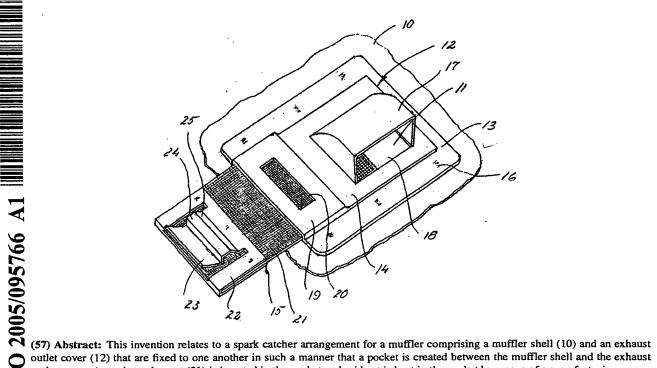

outlet cover (12) that are fixed to one another in such a manner that a pocket is created between the muffler shell and the exhaust outlet cover. A spark catcher net (21) is inserted in the pocket and said net is kept in the pocket by means of a snap fastening means (20, 23).